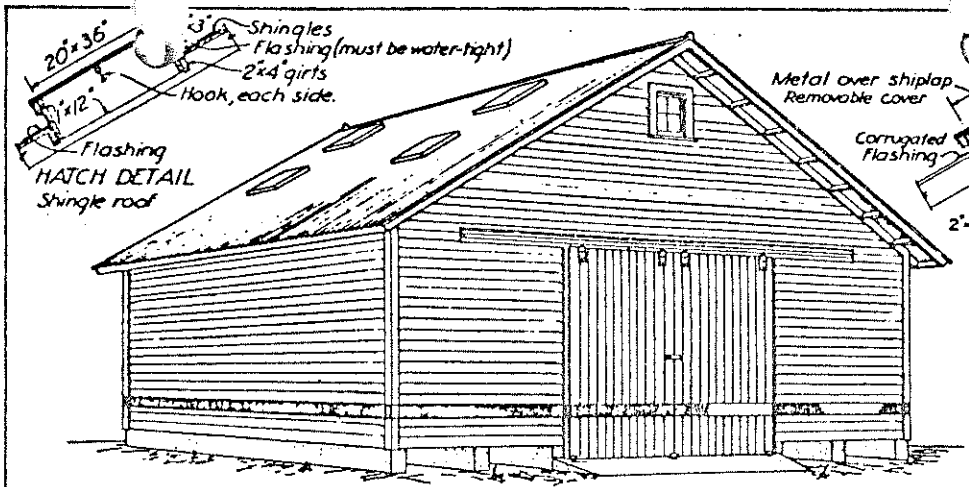

PERSPECTIVE

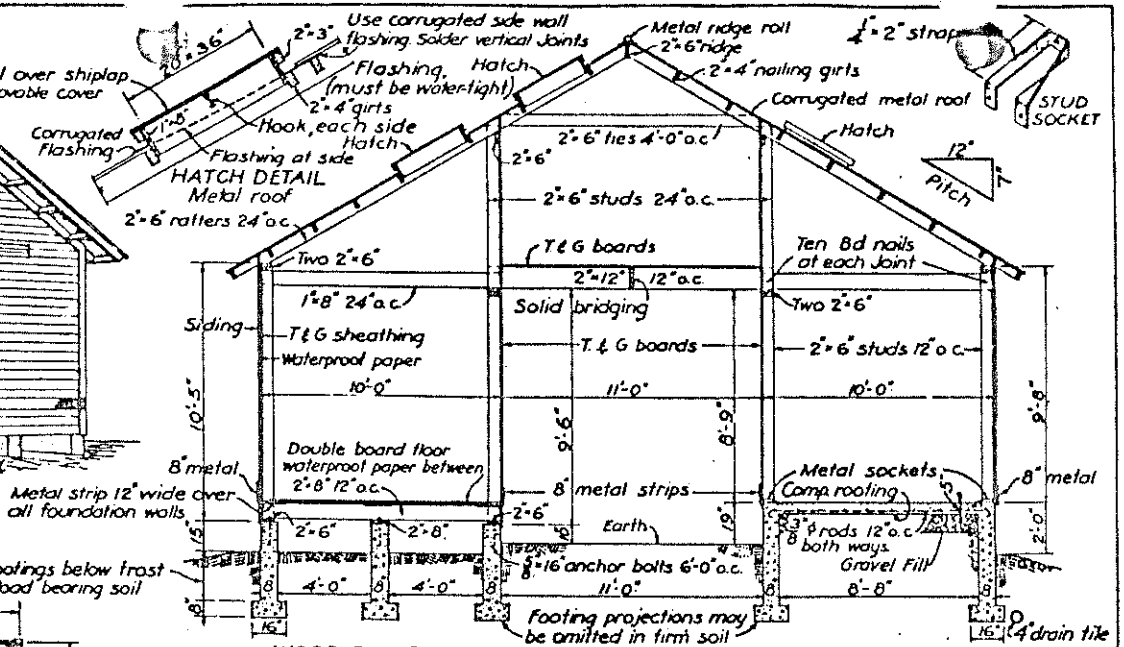

CROSS SECTION

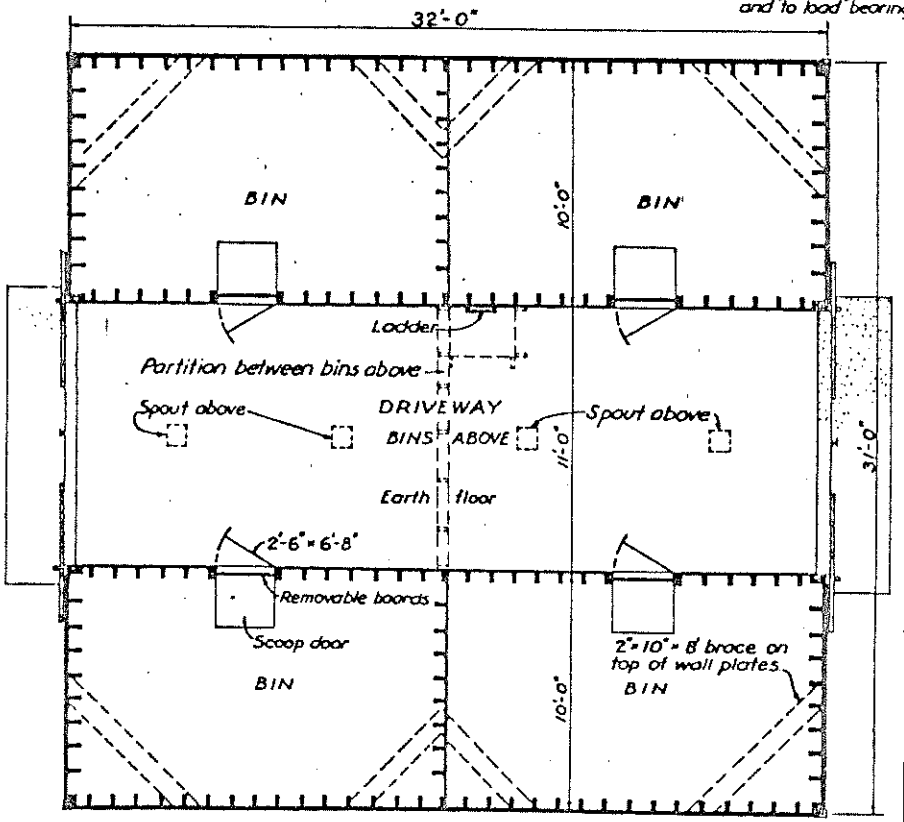

PLAN

CAPACITY 6400 BUSHELS



SCOOP DOOR



HEAD

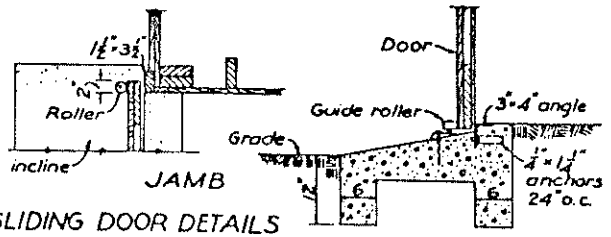

JAMB

SLIDING DOOR DETAILS

SILL

BILL OF MATERIALS

CONCRETE (1:3:5) 114 bags cement, 12 cu yds. sand, 20 cu yds. gravel.
36 - 2"×12"×12' joist, bridging, & sliding door lintels.
4 - 2"×8"×16' sills.
72 - 2"×8"×10' joist.
32 - 2"×6"×16' sills, plates, studs.
76 - 2"×6"×14' rafters, studs,
20 - 2"×6"×12' ridge, ties, headers.
200 - 2"×6"×10' plates, studs, ties.
96 - 2"×4"×12' girts, blocking, etc.
3400 ft B M T & G flooring
2750 ft B.M. T & G shiplap
1750 ft B. M. drop siding.
6 - 2"×10"×12' sliding door head casings. 2 - 2"×10"×16' braces.
4 - 1"×10"×12' door battens.
44 - 1"×8"×10' " " and ties
20 - 1⅛"×3½"×12' trim.
10 - 1"×2"×14' door stops. 2 - 3"×4"×⅜" angles 11' long.
5 rolls waterproof paper. 36 - ⅝"×16" anchor bolts.
200 lin ft metal 8" wide. 200 lin ft metal 12" wide.
35 lin ft 28 ga metal 30" wide, hatch covers and flashing
66 sheets 26 ga corrugated metal 10 ft lengths.
34 lin ft metal ridge roll 90 lin ft hatch flashing.
2 windows 4 lights 10"×12" with frames and trim.
Paint, nails and door hardware not included.

COOPERATIVE EXTENSION WORK IN AGRICULTURE AND HOME ECONOMICS

AND UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

GRANARY

USDA	EX. 5529	SHEET 1 OF 1