

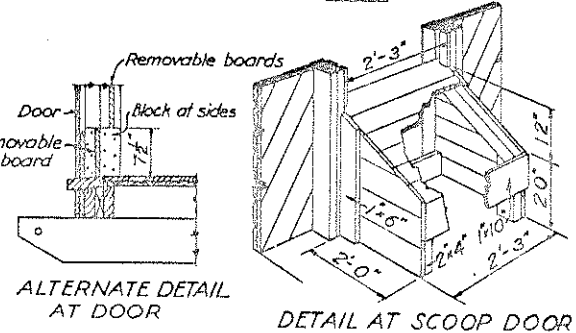
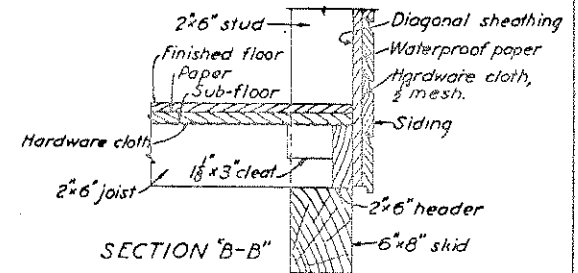
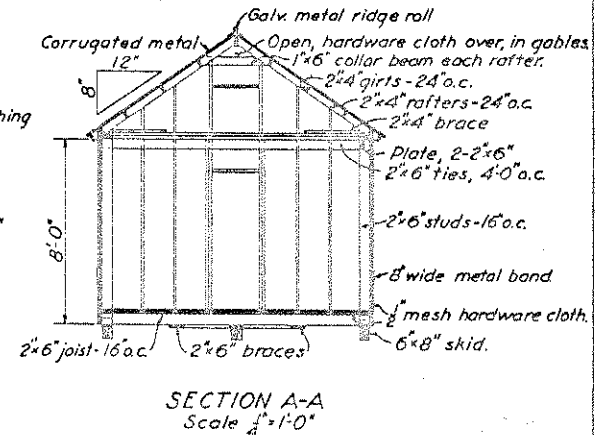


PERSPECTIVE

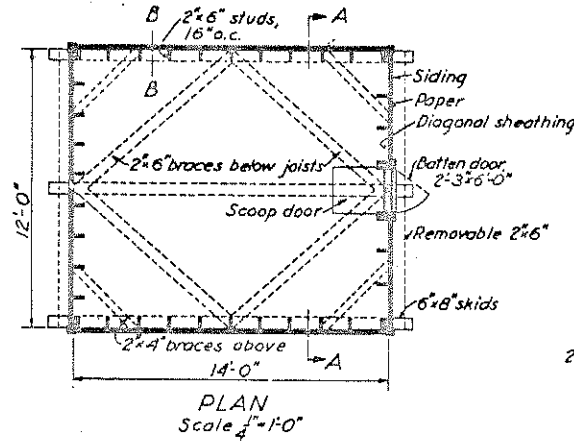

- BILL OF MATERIAL**
- 3 - 6" x 8" x 16'-0" - skids.
 - 24 - 2" x 6" x 16'-0" - studs and ridge
 - 4 - 2" x 6" x 14'-0" - side plates.
 - 22 - 2" x 6" x 12'-0" - joists, ties, spreaders, & end plates.
 - 4 - 2" x 6" x 10'-0" - braces.
 - 20 - 2" x 4" x 16'-0" - rafters, girts, braces etc.
 - 120 - lin. ft. 1 1/2" x 4" - corner boards, trim, and casing.
 - 50 - lin. ft. 1 1/2" x 4" - corner boards and cleats.
 - 800 ft. B.M., T. & G. - sheathing - walls, sub-floor, etc.
 - 250 ft. B.M., T. & G. - flooring - finished floor and doors.
 - 600 ft. B.M. - drop siding.
 - 3 - 216 ft rolls - waterproof building paper.
 - 2 - 2" x 6" - door sills.
 - 16 pieces - 26 ga. - corrugated metal, 8'-0" long - roof.
 - 16 lin. ft. - metal ridge roll.
 - 290 sq. ft. - 1/2" mesh - hardware cloth.
 - 60 lin. ft. - 28 ga. - galv. metal strips - 8" wide.
 - 3 - 6" Tee hinges.
 - 2 - 4" Tee hinges.
 - 2 - Hasps.

Nails, paint, and log sills not included in above list

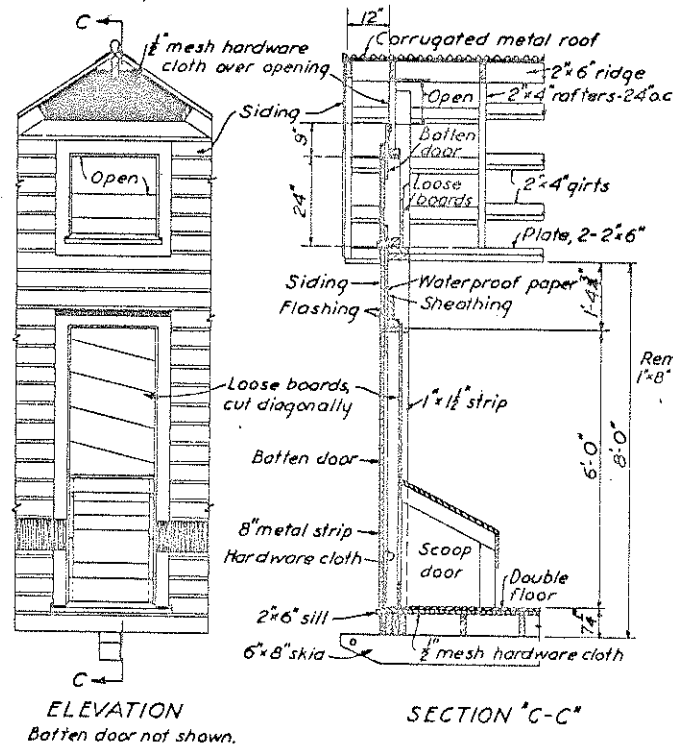

DOOR DETAILS
Scale $\frac{1}{8}'' = 1'-0''$

CAPACITY-1000 BUSHELS

COOPERATIVE EXTENSION WORK IN
AGRICULTURE AND HOME ECONOMICS
STATE OF MARYLAND
UNIVERSITY OF MARYLAND
AND
U. S. DEPT. OF AGRICULTURE COOPERATING
EXT. AGR. ENGINEER - COLLEGE PARK, MD

FILE NO. 792-3

5531