




26 FOOT WIDTH
(BASIC UNIT)

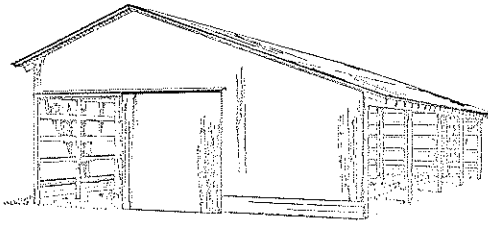

39 FOOT WIDTH

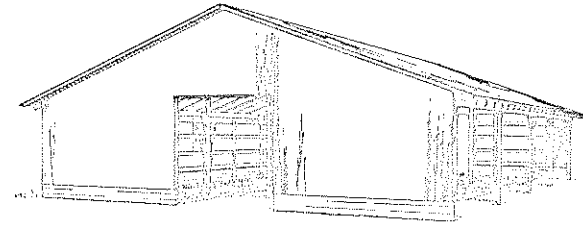

52 FOOT WIDTH

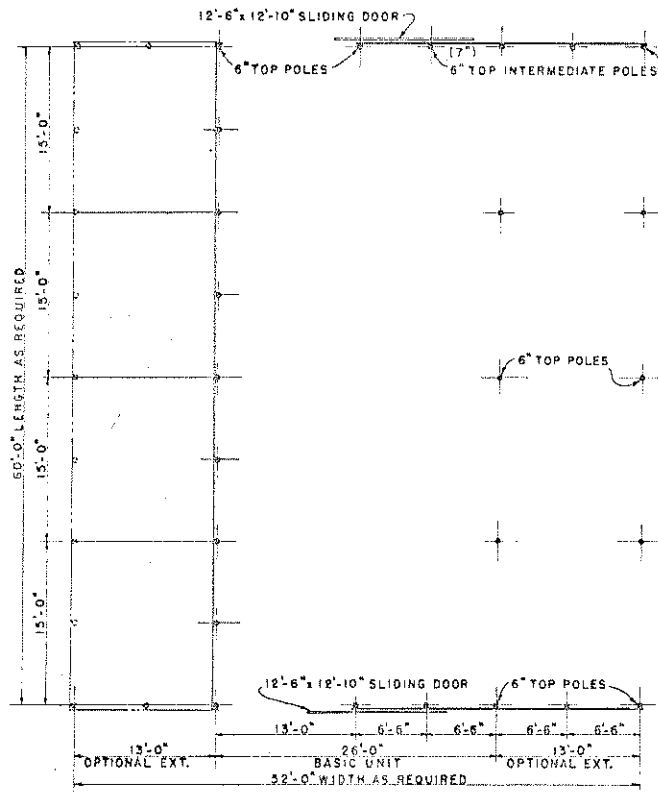

NOTE:


LENGTH OF THE BUILDING MAY BE VARIED IN UNITS OF 15 FEET.

THIS STRUCTURE IS PRIMARILY INTENDED FOR USE IN AREAS WHERE THE SNOW LOAD DOES NOT EXCEED


20 LB. PER SQUARE FOOT AND WIND DOES NOT EXCEED 80 MILES PER HOUR. IN AREAS SUBJECT TO SNOW LOADS UP TO 30 LB. PER SQUARE FOOT OR HIGHER WINDS USE THE FIGURES SHOWN IN

PARENTHESES (...) FOR FRAMING SIZES AND NAILS.

ALL POLES, SPLASH BOARDS AND OTHER WOOD IN CONTACT WITH THE GROUND OR MANURE TO BE TREATED

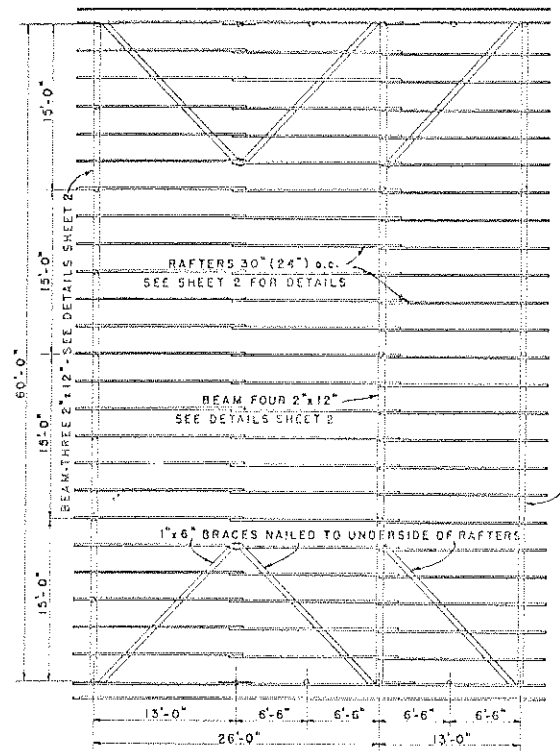

ROOF FRAMING PLAN




WITH PRESERVATIVE.

THE 2 1/2" CORRUGATED METAL ROOFING IS APPLIED TO 2"x4" NAILING STRIPS SPACED NOT OVER 24" APART OR AS SPECIFIED BY THE MANUFACTURER.



COOPERATIVE EXTENSION WORK IN
AGRICULTURE AND HOME ECONOMICS
DEPARTMENT OF AGRICULTURAL ENGINEERING
UNIVERSITY OF MARYLAND
AND
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

TYPE "C" POLE CONSTRUCTION
26' 39' OR 52' WIDTH

USDA '57 LX. 5832 SHEET 1 OF 2

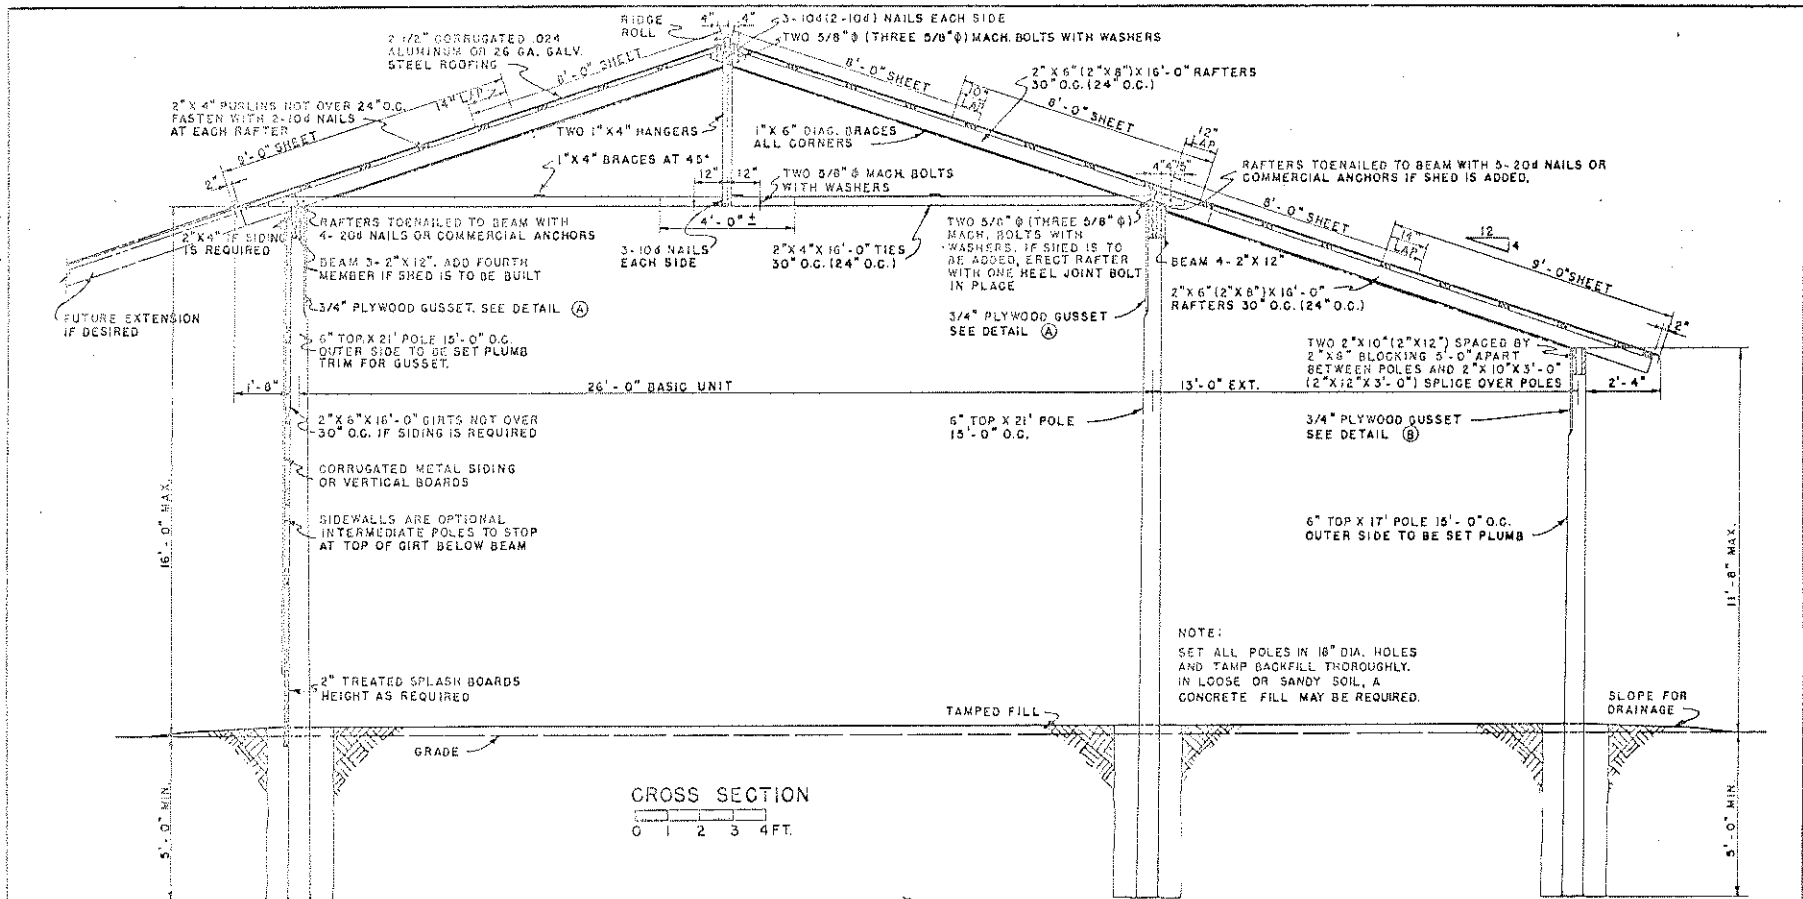

CROSS SECTION
0 1 2 3 4 FT.

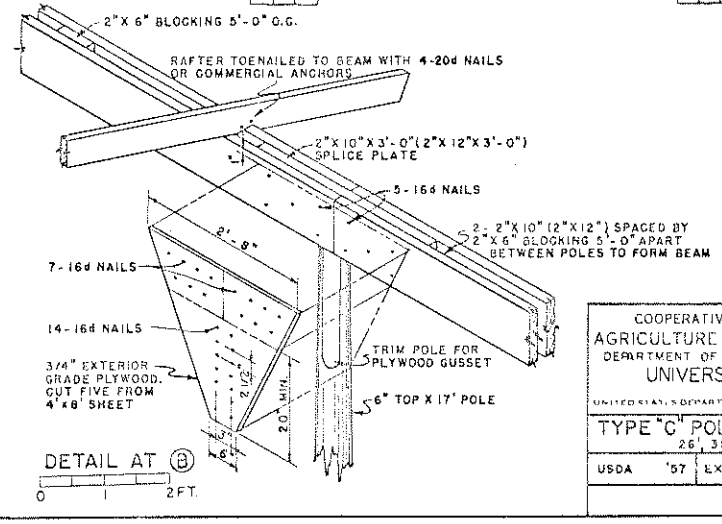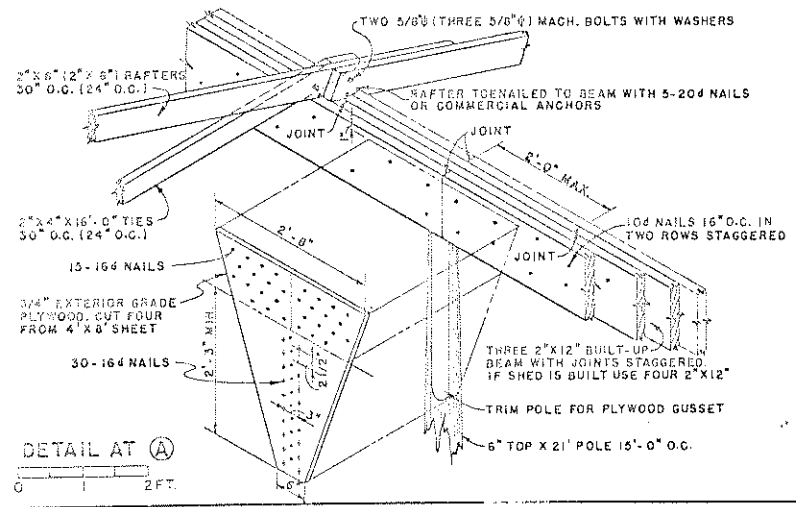

COOPERATIVE EXTENSION WORK IN
 AGRICULTURE AND HOME ECONOMICS
 DEPARTMENT OF AGRICULTURAL ENGINEERING
 UNIVERSITY OF MARYLAND
 AND
 UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

TYPE "C" POLE CONSTRUCTION
 26, 30' OR 36' WIDTH

USDA '57 EX. 5832 SHEET 2 OF 2