

RIGHT END ELEVATION
PROJECTING TYPE ROOF

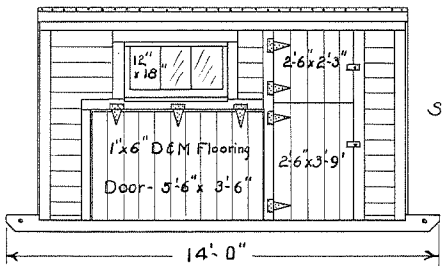

FRONT ELEVATION

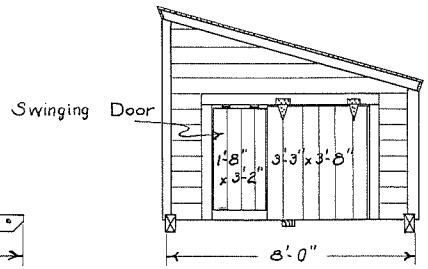

LEFT END ELEVATION
FLUSH TYPE ROOF



RIGHT END FRAMING

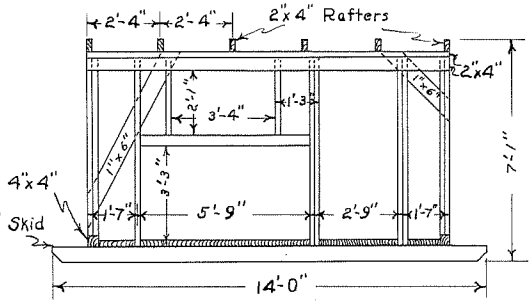

FRONT FRAMING



LEFT END FRAMING

	SIZE & DESCRIPTIONS
2	4"x6"x 14'-0" No.1 Fir, Skids
2	4"x4"x 8'-0" " " Cross Pieces
1	4"x4"x 12'-0" " " Center Floor Support
13	2"x12"x 8'-0" " " Floor & Corner Braces
3	2"x4"x 18'-0"
2	2"x4"x 16'-0" " " Studs, Rafters, Etc.
6	2"x4"x 14'-0"
8	2"x4"x 12'-0"
1	2"x6"x 3'-6" " " Window Ledge
21	1"x6"x 12'-0" No.4 Clear Drop Siding
20	1"x6"x 12'-0" No.3 Clear D&M Flooring
28	1"x6"x 8'-0" " " " "
7	1"x6"x 16'-0" No.2 Common
11	1"x4"x 12'-0" No.1 Pine, Trim
1	Roll 108 Sq. Ft. 3 Ply Heavy Roofing

Nails: 4 lbs. 20 d. Common
8 lbs. 16 d. "
3 lbs. 10 d. "
5 lbs. 8 d. "
4 lbs 7 d. Box

16 - 4"x6" "T" hinges with 1½ in. Screws
4 - ½"x10" Carriage Bolts with Washers
2 - ½"x8" " " " "
2 Fasteners for Man Door
Eye Bolts & Chains to Hold Doors Open
Eye Bolt Hinges for Swinging Door
1¼ Gal. Paint & Linseed Oil

Estimated Cost of Materials $55.00

NOTE: PORTABLE HOG HOUSE MAY BE BUILT WITH EITHER PROJECTING OR FLUSH TYPE ROOF. BILL OF MATERIALS IS FOR FLUSH TYPE ROOF. IF NO FLOOR IS DESIRED, SUBTRACT 1 - 4"X 4"X12' AND 12 - 2"X12" X 8'

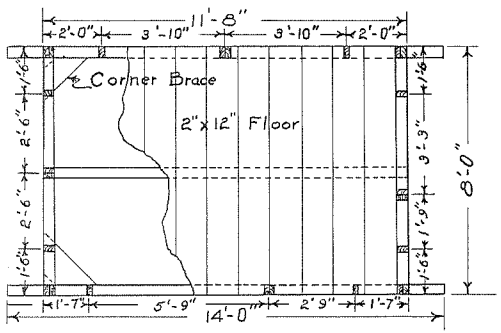

FLOOR PLAN

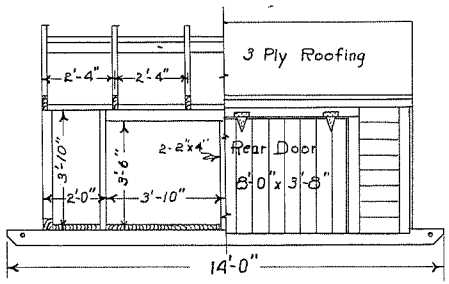

REAR FRAMING & ELEVATION

COOPERATIVE EXTENSION WORK IN
AGRICULTURE AND HOME ECONOMICS
STATE OF NORTH DAKOTA
NORTH DAKOTA AGRICULTURAL COLLEGE
AND
U. S. DEPT. OF AGRICULTURE COOPERATING
EXT. AGR'L ENGINEER — FARGO, N.DAK.

PORTABLE HOG HOUSE

PLAN NO. N.D.726-3-1/1 DRAWN BY C.F.K. 6/20/33