


BILL OF MATERIALS

Qty.	Size and Description	Bd/Ft	Cost
1	2"x4"x16'-0" - Corners	10 2/3	.50
5	1"x12"x16'-0" - Sides and Ends	80	4.32
	1" Sd. Nails		.05
	Labor - 1 Hour @ \$.50		.50
	Total	90 2/3	5.37

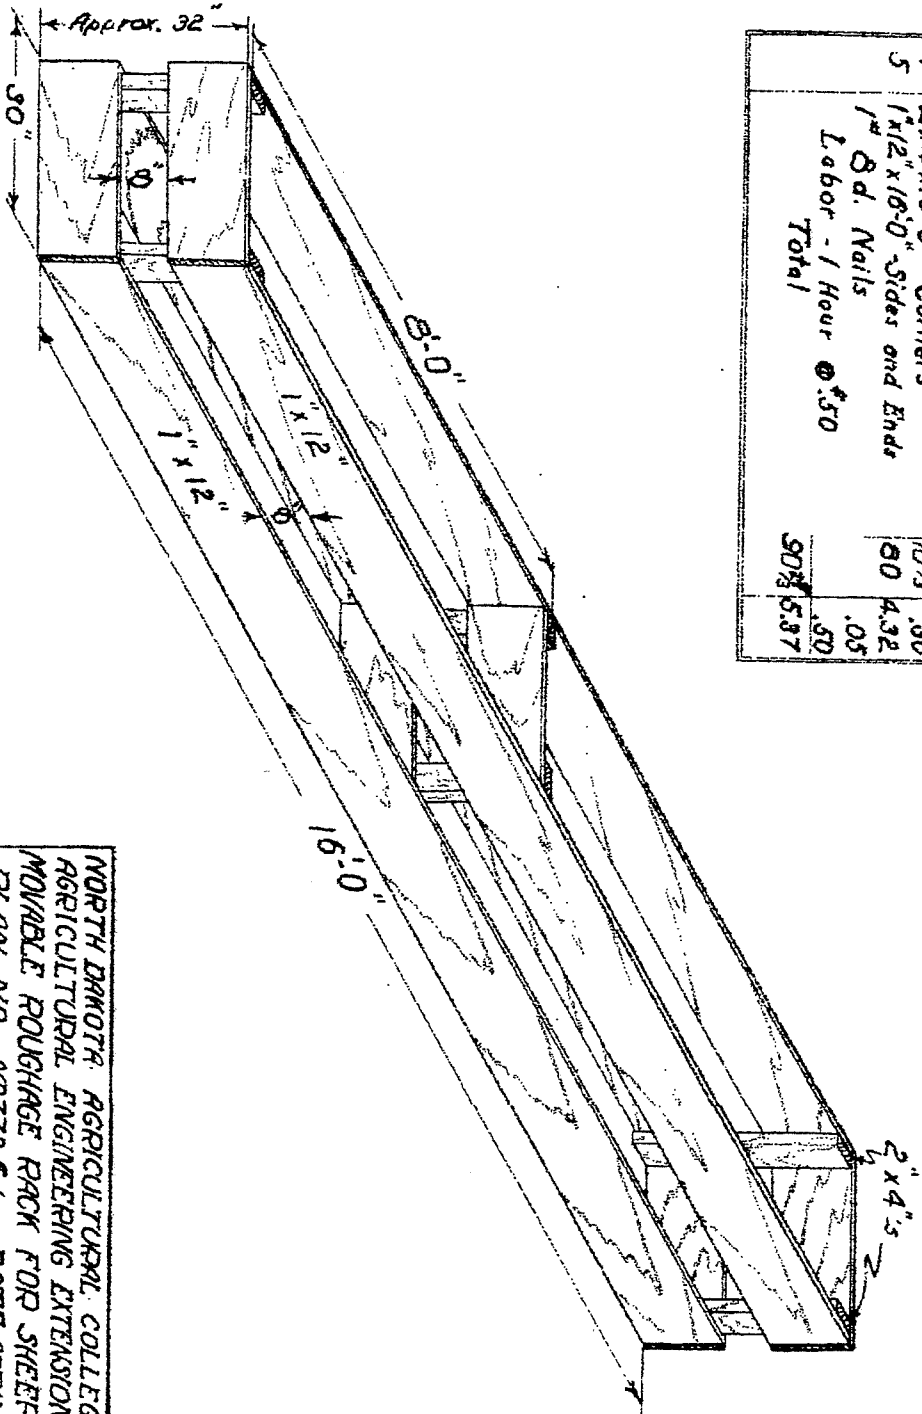

NORTH DAKOTA AGRICULTURAL COLLEGE
 AGRICULTURAL ENGINEERING EXTENSION
 MOVABLE ROUGHAGE RACK FOR SHEEP
 PLAN NO. ND772-6-1 DATE: APRIL 32
 Designed by C.L.H. Drawn by C.F.K.