



### BILL OF MATERIALS


- 2 PCS. -  $\frac{1}{2}$ " $\times$ 4'-0" $\times$ 8'-0" EXTERIOR PLYWOOD-REMOVABLE SIDES AND TROUGH SIDES.
- 1 PC. - 2" $\times$ 8" $\times$ 10'-0" GOOD GRADE FIR-TROUGH BOTTOM AND ENDS.
- 7 PCS. - 1" $\times$ 2" $\times$ 6" $\frac{3}{4}$ " CLEATS.
- 2 PCS. - 1" $\times$ 8" $\times$ 14" NAILED ON TROUGH ENDS TO PREVENT OVERTURNING.
- 1 PC. -  $\frac{1}{2}$ " $\times$ 1" $\times$ 23" $\frac{1}{2}$ " STRAP IRON-CENTER REINFORCING.
- 2 CARRIAGE BOLTS -  $\frac{1}{2}$ " $\times$ 1" BOLT ON STRAP IRON.
- WATER PROOF GLUE ON ALL WOOD JOINTS.
- GALVANIZED NAILS, SPIKES, AND BOLTS.

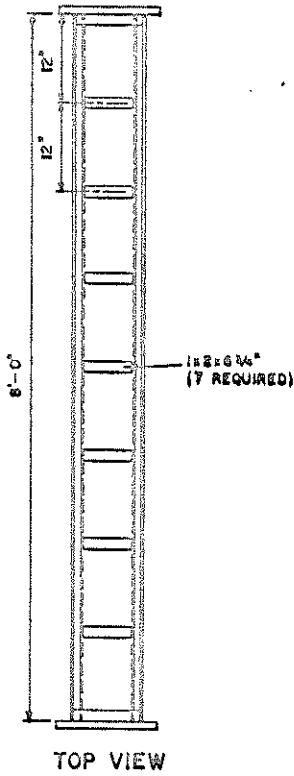

TOP VIEW

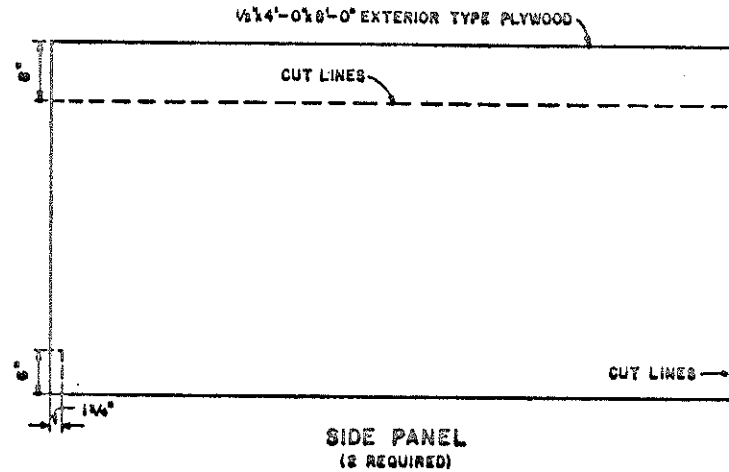


SIDE PANEL  
(2 REQUIRED)



SECTION

NOTE: THIS TROUGH IS MADE FOR PORTABILITY. THE HIGH SIDES ARE REMOVABLE. THE CLEATS IN THE BOTTOM OF THE TROUGH SHOULD BE CENTERED PROPERLY FOR THE SIDES TO FIT DOWN AND PROVIDE SUPPORT WHILE IN USE. BY MAKING THIS TROUGH NARROW, THE SHEEP ARE LESS LIKELY TO STRUGGLE TO GET OUT OVER THE SIDES.

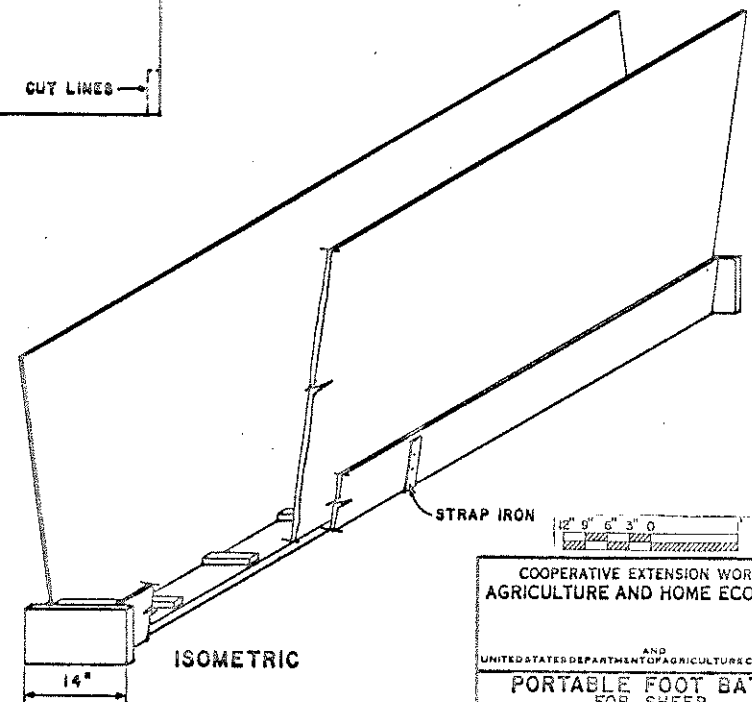

ISOMETRIC

BASED ON: OREGON STATE UNIV.  
PLAN NO. 96

COOPERATIVE EXTENSION WORK IN  
AGRICULTURE AND HOME ECONOMICS

AND  
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

PORTABLE FOOT BATH  
FOR SHEEP

ORE.	'72	6142	SHEET 1 OF 1
------	-----	------	--------------