




DRIVEWAYS

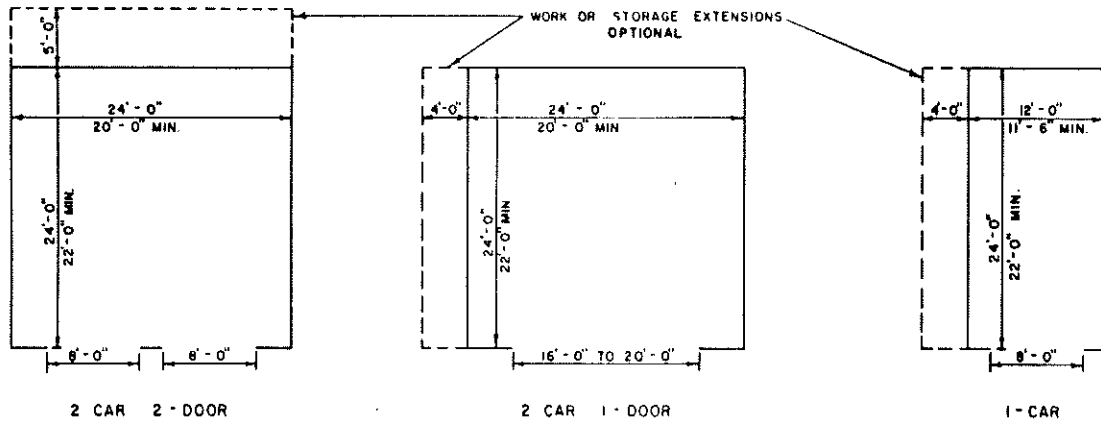

FLOOR PLANS (INTERIOR DIMENSIONS)

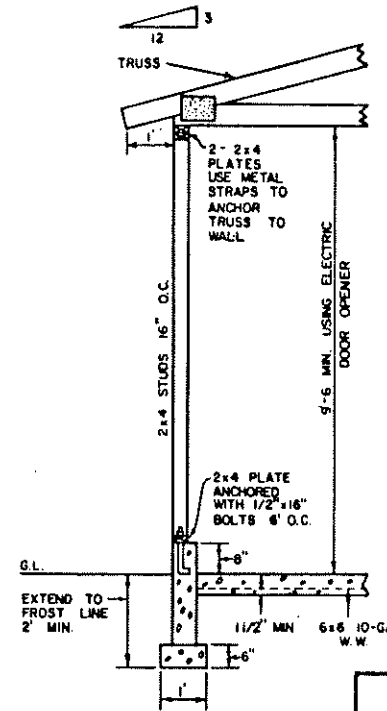

WALL SECTION



GARAGE CONSTRUCTION NOTES

Roof: Purchase truss that satisfies span & snow load requirements. 3 in 12 min. slope for asphalt shingles.

Garage Door Notes:

Overhead doors recommended -- Available in various widths and heights. Min. width = 8' /car; min. height = 8'. Minimum lintel sizes for 401b/ft total load:
 8' opening = 2x6 on edge
 16' " = 2x8 on edge
 20' " = 2-2x8 on edge or 1-2x10 on edge

Concrete Notes:

Floor: 4" min (5" better) thick slab with 6x6 - 10 ga. welded wire.
 Foundation - 6" wide concrete or 8" concrete blocks. NOTE: Fill core of blocks for anchor bolts.

COOPERATIVE EXTENSION SERVICE
 AGRICULTURE AND HOME ECONOMICS

AND
 UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

PLANNING 1 AND 2 CAR
 GARAGES

MD '88 6415 SHEET 1 OF 1