

FLOOR PLAN

1440 FT² HEATED AREA

MARK	SIZE	D.O.O.R.	SCHEDULE	DESCRIPTION	QTY
1	3.0" x 6.8"			EXTERIOR SOLID CORR.	3
2	3.0" x 8.2"			EXTERIOR SOLID CORR. W/GLASS	1
3	2.8" x 8.8"			INTERIOR HOLLOW CORR.	7
4	1.6" x 4.8"			INTERIOR HOLLOW CORR.	1
5	2.9" x 6.8"			31-FLOOR	6
6	2.9" x 6.8"			31-FLOOR	1

MARK	SIZE	ATTACHMENT	SCHEDULE	DESCRIPTION	QTY
1	3.4" x 4.2"			WOOD FINISH	13
2	3.4" x 4.2"			WOOD FINISH	13
3	3.0" x 3.4"			WOOD FINISH	3


COOPERATIVE EXTENSION SERVICE
 AGRICULTURE AND HOME ECONOMICS

UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING


THREE BEDROOM FRAME HOUSE

S. C. 74 7203 SHEET 1 OF 3


REV. '87

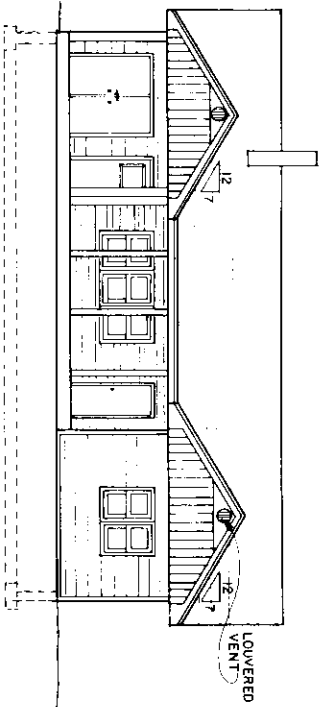


FRONT ELEVATION

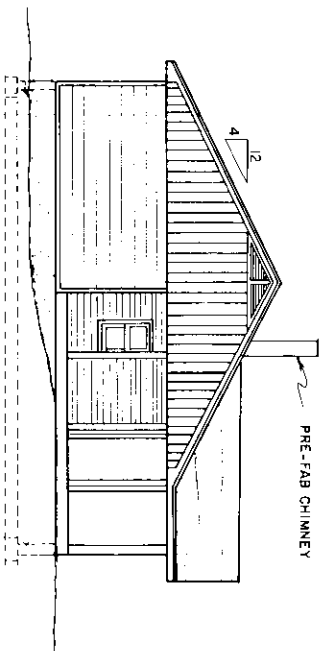


LEFT ELEVATION

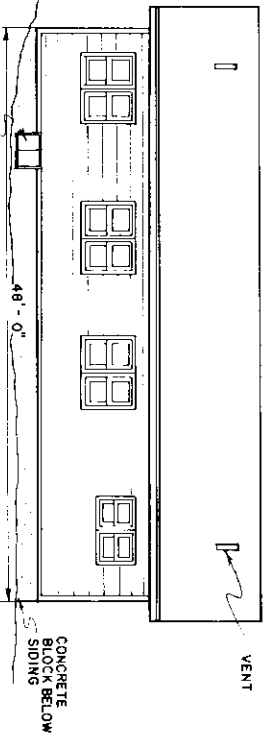


BACK ELEVATION

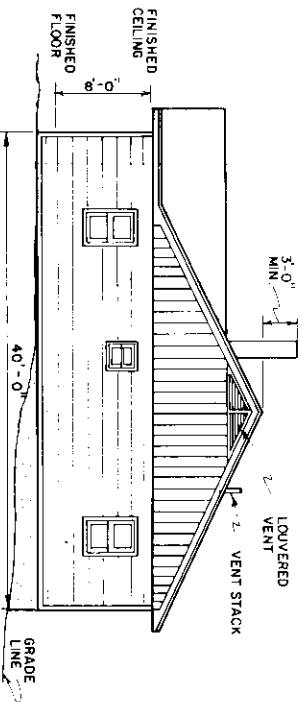

RIGHT ELEVATION

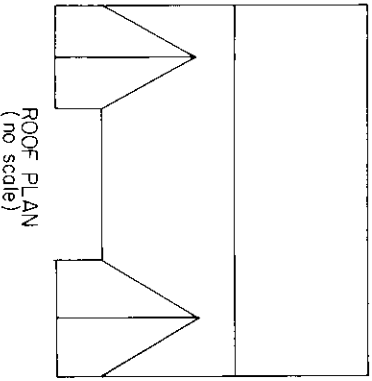

ROOF PLAN
(no scale)

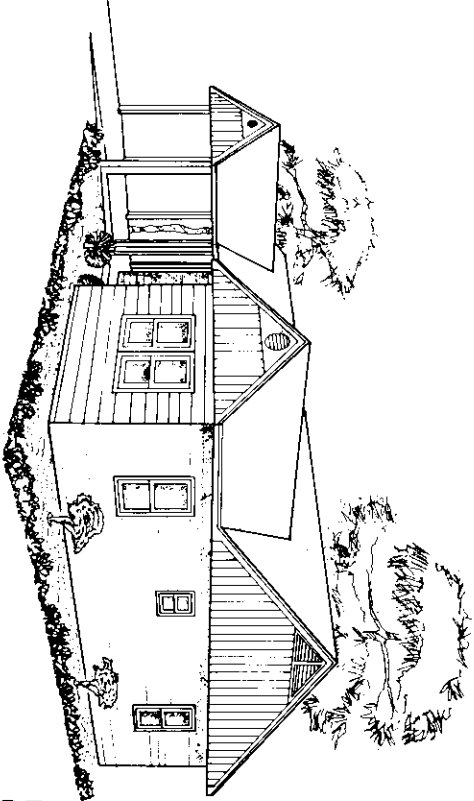

PERSPECTIVE
(no scale)

COOPERATIVE EXTENSION SERVICE AGRICULTURE AND HOME ECONOMICS			
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING AND AGRICULTURE COOPERATING			
THREE BEDROOM FRAME HOUSE			
S. C. 74	7203	SHEET 2 OF 3	
REV. 87			

COOPERATIVE EXTENSION SERVICE AGRICULTURE AND HOME ECONOMICS		
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING		
THREE BEDROOM FRAME HOUSE		
S. C. 74	7203	SHEET 3 OF 3
REV '87		

CONSTRUCTION CHECK LIST

1. CHECK LOCAL BUILDING CODE AND LOAN COMPANY CRITERIA. PURCHASE PERMITS TO MEET LOCAL SNOW LOAD CRITERIA.
2. ADDITIONAL WALL AND ANCHOR JOINTS.
3. DOUBLE JOISTS UNDER TOES AND OTHER HEAVY LOADS.
4. SPACER CORNERS WITH 1/2" PLYWOOD OR HIGH DENSITY FIBERBOARD OR USE DIAGONAL BRACING.
5. USE EXTERIOR GRADED PLYWOOD WHEREVER IT MAY BE WETTED DURING OR AFTER CONSTRUCTION.
6. PRESSURE TREAT ALL WOOD WITH GROUND CONTACT AND PROVIDE OTHER MEANS FOR TERMITES CONTROL.
7. R VALUES DEPEND ON LOCAL CLIMATE AND FUEL COSTS.
8. PROVIDE 1 SQ FT OF ATTIC VENT OPENINGS FOR EACH 150 SQ FT OF CEILING.
9. WATERPROOF ALL OPENINGS AND JOINTS.

