

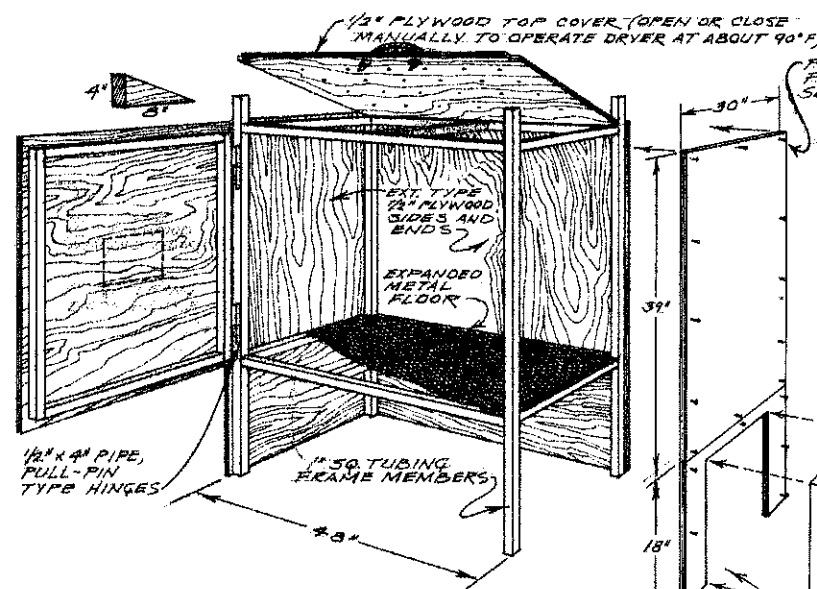
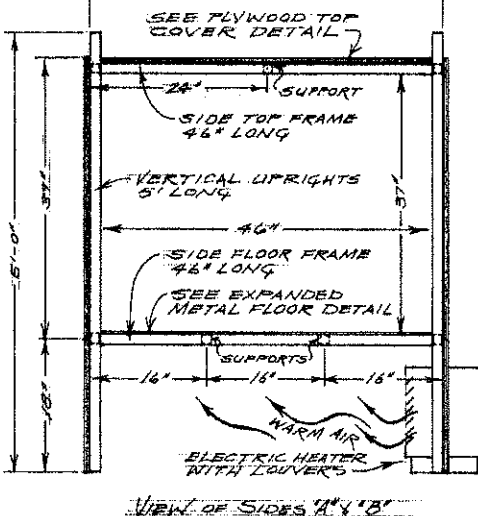
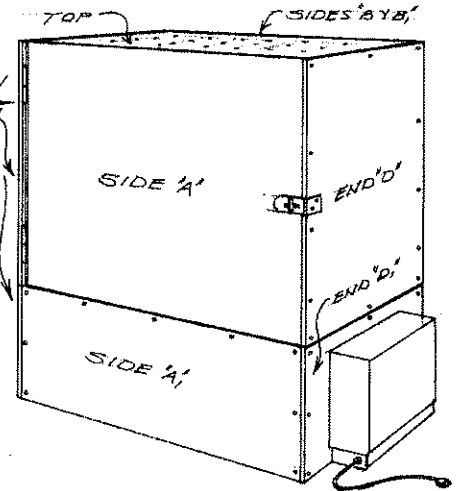
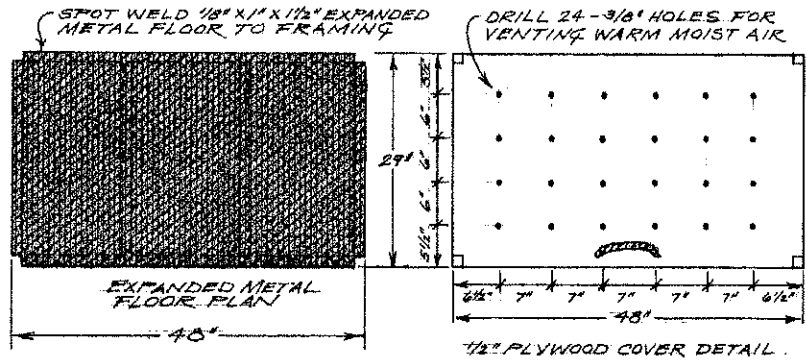


NOTE: SEAL ALL SURFACES AND EDGES OF PLYWOOD PANELS WITH 1 COAT OF WOOD PRIMER AND 1 COAT OF ENAMEL PAINT FOR DISINFECTATION PURPOSES

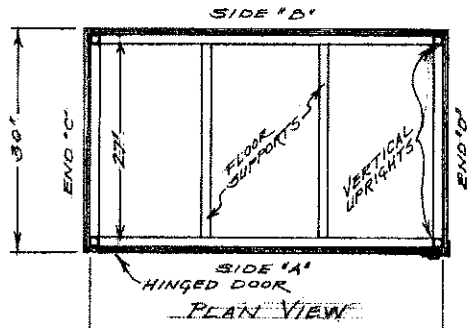

PRE-DRILL PLYWOOD FOR 1/8" X 1" SELF-DRILLING, SELF-TAPPING SCREWS, APPROX 12" APART

4' X 8' SHEET CUTTING PATTERN (1/2" EXTERIOR TYPE PLYWOOD OR EQUAL)

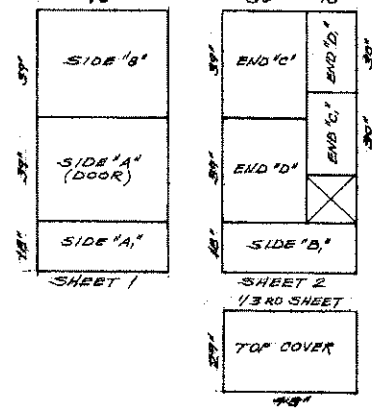

CUT OPENING TO FIT 5000 WATT, 230 V., ADJUSTABLE LOUVERS, ELEC. HEATER

PORTABLE DRYER-WARMER NDSU-7-5 FOR NEW BORN CALVES			
SCALE: 1" = 1 FT.	APPROVED BY: DEXTER JOHNSON	DRAWN BY: R.C.C.	
DATE: 12/12/53		REVISED	
PREPARED BY NDSU EXPANSION AGR. ENGR. DEPT.			
DESIGNED BY MR. RAY HAWCK, MARSHALL, N.D.			
DRAWING NUMBER			SHEET 1 OF 1