



LONGITUDINAL SECTION

SCALE: 0 1 2 3 4 FT.

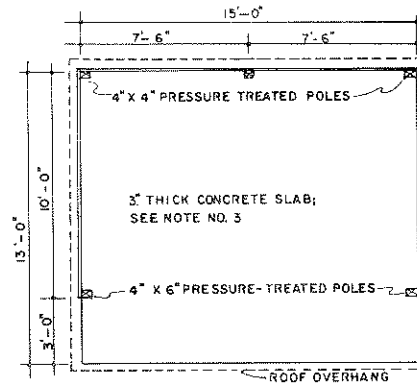


PLAN

SCALE: 0 2 4 6 FT.

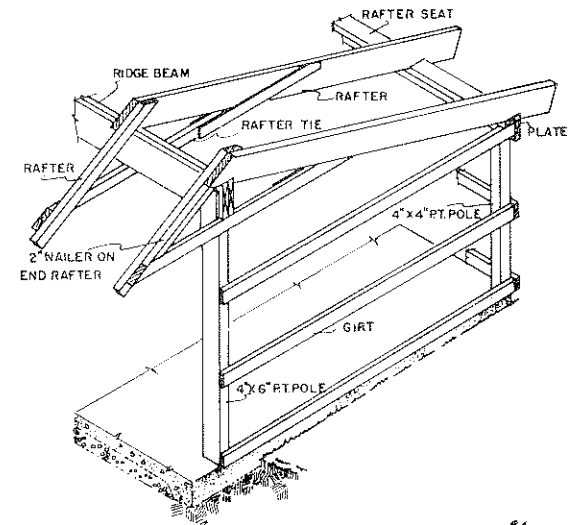


FRAMING PERSPECTIVE

NO SCALE

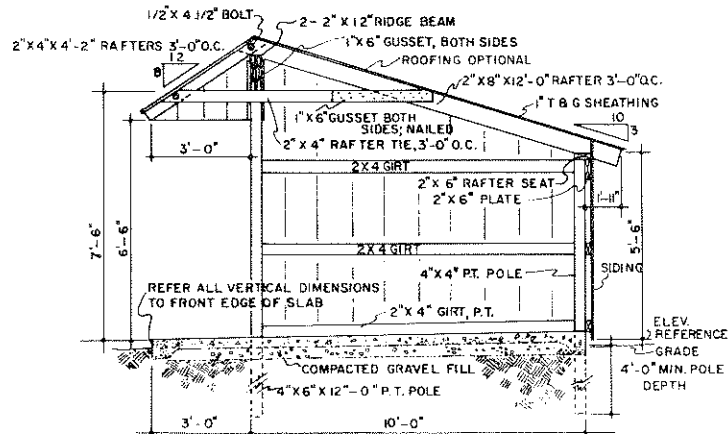

CROSS SECTION

SCALE: 0 1 2 3 4 FT.

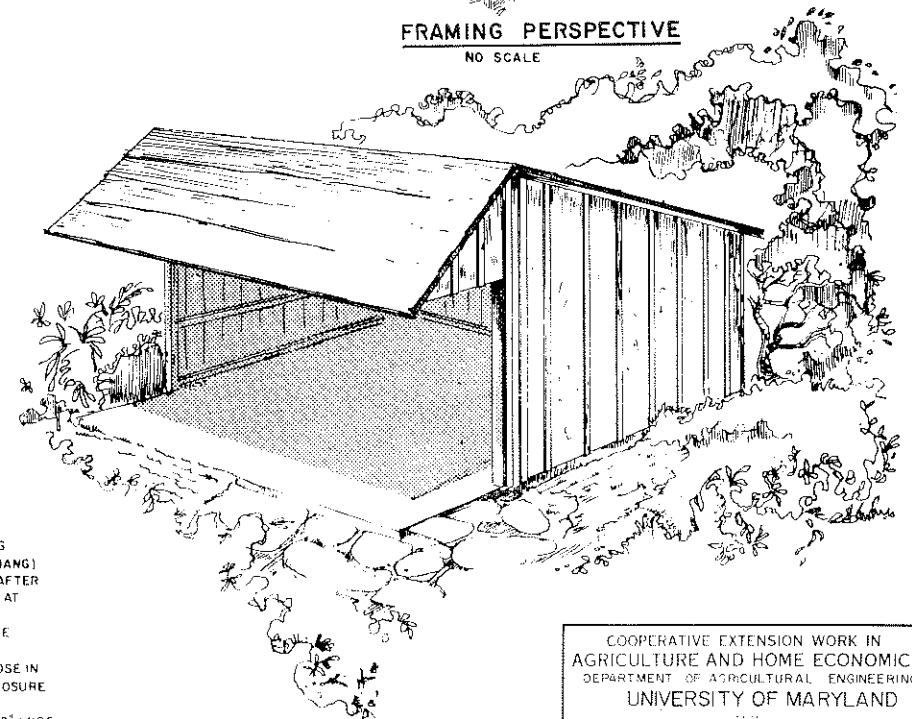

- 1 DESIGN IS BASED ON ROUGH SAWN EASTERN HEMLOCK.
- 2 DESIGN ROOF LOAD: 30 lbs PER SQ FOOT.
- 3 CONCRETE FLOOR SLAB HAS THICKENED EDGE 9" DEEP BY 6" WIDE ALONG BOTTOM SURFACE, SLOPE FLOOR APPROX 1/4" PER FOOT FROM REAR TO OPEN FRONT FOR DRAINAGE (PUDDLING WITHIN SHELTER FROM WIND DRIVEN RAIN MAY BE MINIMIZED BY INCREASING THE SLOPE OF THE 3' FRONT APRON) REQUEST A CONCRETE MIX WITH 3/4" MAX SIZE AGGREGATE, 6 1/2 SACKS OF CEMENT PER CUBIC YARD, 6 GAL WATER / CEMENT RATIO, AND 6 PERCENT ENTRAINED AIR BY VOLUME.
- 4 TAMPED EARTH OR GRAVEL FLOORS MAY BE SUBSTITUTED FOR CONCRETE IF DESIRED.
- 5 ALL WOOD IN CONTACT WITH EARTH OR CONCRETE SHOULD BE PRESSURE TREATED WITH A PRESERVATIVE.
- 6 ASSEMBLE RAFTER UNITS ON THE GROUND IN A JIG FOR BOLT LOCATION; DETACH SHORT 2 X 4 (OVERHANG) RAFTER FROM THE UNIT FOR ERECTION; THE 2 X 8 RAFTER SHOULD BE ON THE OUTSIDE OF THE 2 X 4 OVERHANG AT BOTH ENDS OF THE BUILDING.
- 7 ERECT THE 4 X 6 POLES WITH RIDGE-BEAM FIRST, THE REAR WALL POLES CAN THEN BE LOCATED.
- 8 FOR WEATHER PROTECTION OR SECURE STORAGE, CLOSE IN THE FRONT WITH AN OPEN FRONT, A SOUTHERN EXPOSURE IS DESIRABLE.
- 9 ROUGH-SAWN BOARD & BATTEN SIDING WITH 10" TO 12" WIDE BOARDS & 2" TO 3" WIDE BATTENS ON CRACKS BETWEEN BOARDS IS ATTRACTIVE. OTHER SIDING MATERIALS CAN BE USED IF DESIRED.

COOPERATIVE EXTENSION WORK IN
 AGRICULTURE AND HOME ECONOMICS
 DEPARTMENT OF AGRICULTURAL ENGINEERING
 UNIVERSITY OF MARYLAND

FOR INFORMATION CONTACT THE ASSISTANT DIRECTOR FOR COOPERATING

ADIRONDACK-TYPE SHELTER

MARS 1966 EX 5998 SHEET 1 OF 1